
Application scripts

- Most of Trustelem applications allow to set up a script in order to change the default behavior.
- With this script, it is possible to change the SAML or OpenID Connect attributes sent to an application.
- The language used is TypeScript.

Add a script

- Edit your app
- Click on **Custom claims** for OpenID Connect / **Custom scripting** for SAML
- Enter your script

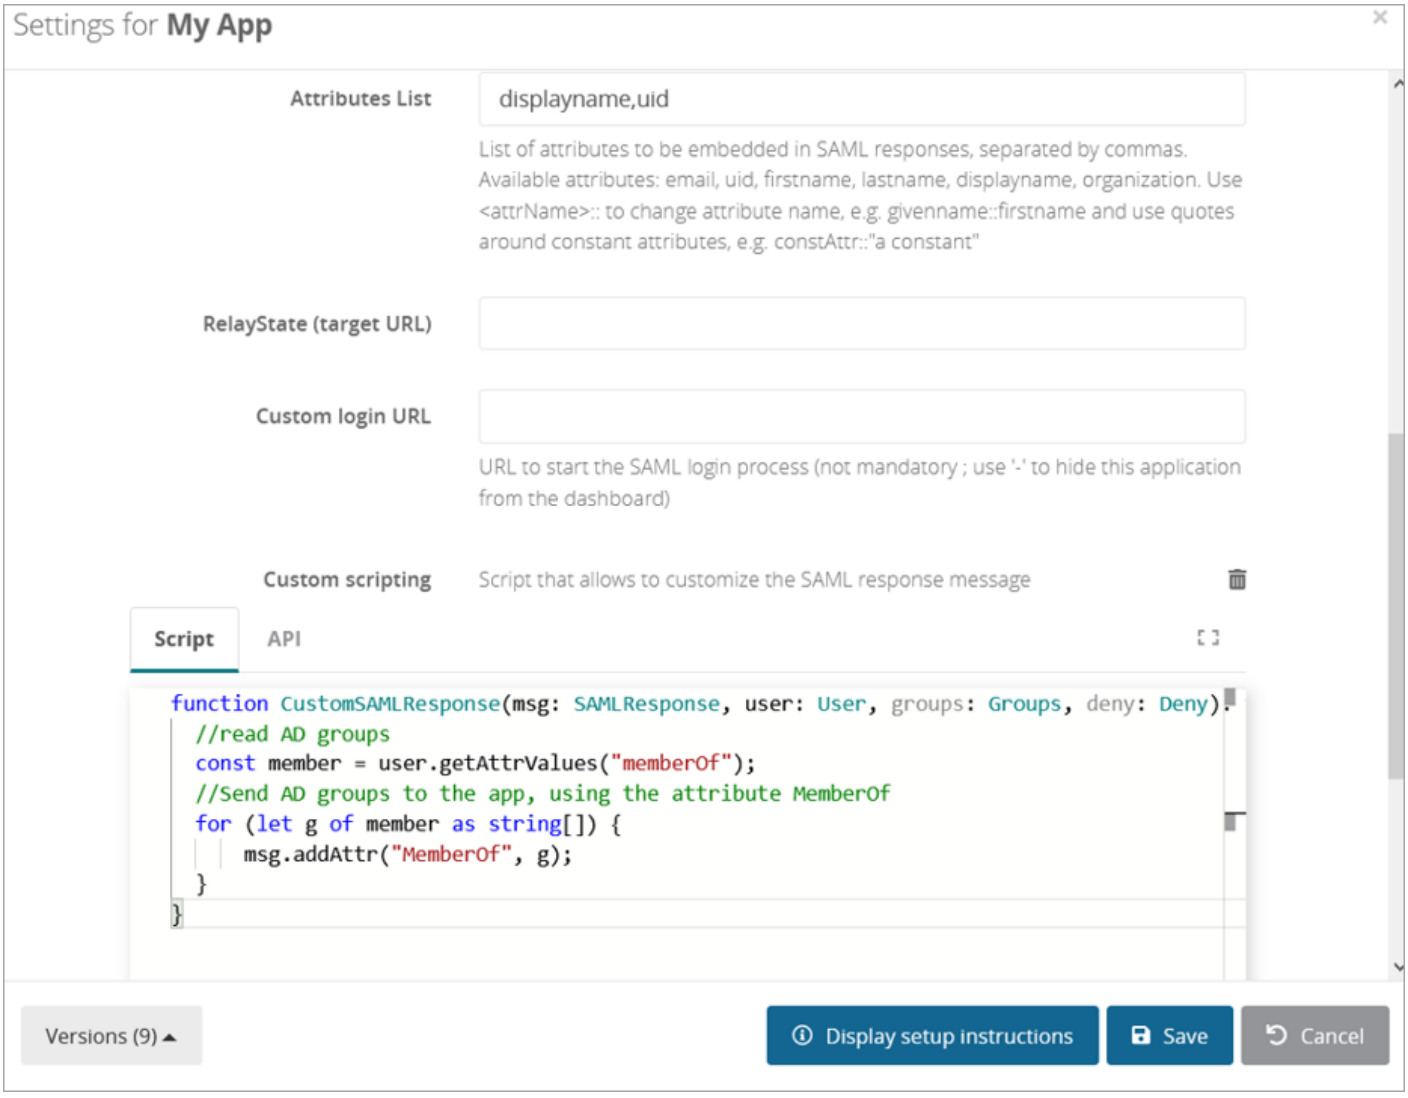

Some examples for SAML applications

Add a constant attribute

```
msg.setAttr("attribute","value");
```

Add an attribute containing Trustelem groups

```
for(let g in groups){
    msg.addAttr("Groups",g);
}
```

Change the user email

```
if (user.email == 'john.doe@contoso.fr') {
    msg.setAttr("email","isabelle.doe@contoso.fr");
}
```

Some examples for OpenID Connect applications

Add a constant attribute

```
claims["attribute"] = "value";
```

Send a user attribute

```
claims["Profile"] = user.getAttr("profile");
```

Add an attribute containing Trustelem groups

```
claims["Groups"] = JSON.stringify(groups);
```

Revision #2
Created 1 July 2022 08:29:05 by WALLIX Admin
Updated 10 October 2023 13:29:53 by WALLIX Admin